




www.se.com


BRU4438903

en


Schneider Charge Pro - Pedestal Instruction Sheet

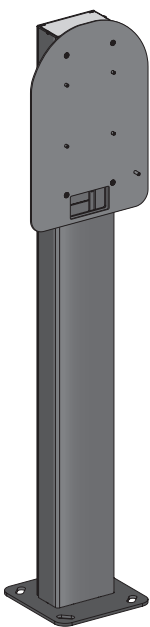



EVA2PBS1

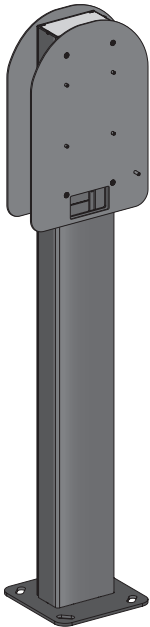


EVA2PBS2

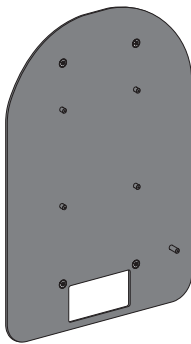

EVA2PCS2

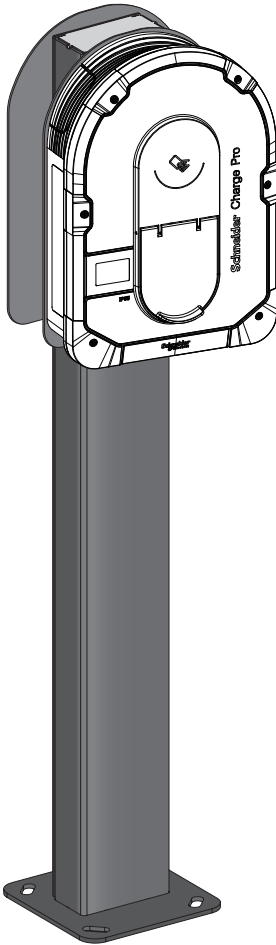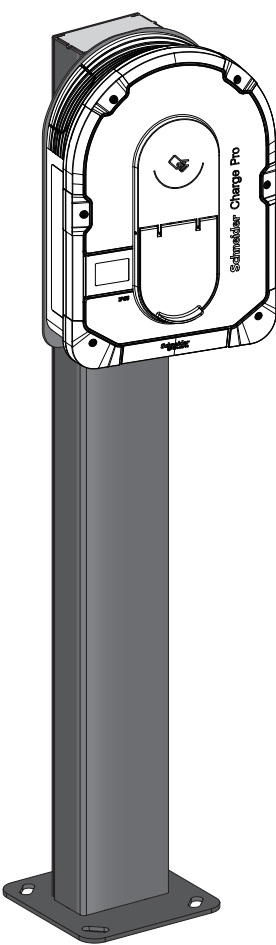

Customer Care Center

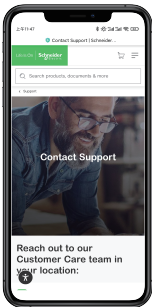

<b>Safety .....</b>	<b>3</b>
<b>1 Content.....</b>	<b>4</b>
<b>2 Civil works .....</b>	<b>5</b>
<b>3 Preparing the pedestal .....</b>	<b>7</b>
3.1 Dimensions .....	7
3.2 For a single charging station .....	8
3.3 For two charging stations .....	10
<b>4 Attaching the pedestal.....</b>	<b>12</b>
<b>5 Grounding .....</b>	<b>13</b>
<b>6 Assembling the charging station .....</b>	<b>14</b>
<b>7 Convert Single Charging Station Pedestal into Double charging station pedestal.....</b>	<b>16</b>
<b>8 Technical data .....</b>	<b>17</b>
<b>9 Recycling packaging .....</b>	<b>17</b>

The information provided in this document contains general descriptions, technical characteristics and/or recommendations related to products/solutions.

This document is not intended as a substitute for a detailed study or operational and site-specific development or schematic plan. It is not to be used for determining suitability or reliability of the products/solutions for specific user applications. It is the duty of any such user to perform or have any professional expert of its choice (integrator, specifier or the like) perform the appropriate and comprehensive risk analysis, evaluation and testing of the products/solutions with respect to the relevant specific application or use thereof.

The Schneider Electric brand and any trademarks of Schneider Electric SE and its subsidiaries referred to in this document are the property of Schneider Electric SE or its subsidiaries. All other brands may be trademarks of their respective owner.

This document and its content are protected under applicable copy right laws and provided for informative use only. No part of this document may be reproduced or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), for any purpose, without the prior written permission of Schneider Electric.

Schneider Electric does not grant any right or license for commercial use of the document or its content, except for a non-exclusive and personal license to consult it on an "as is" basis.

Schneider Electric reserves the right to make changes or updates with respect to or in the content of this document or the format thereof, at any time without notice.

Electrical equipment should be installed, operated, serviced, and maintained only by qualified personnel. No responsibility is assumed by Schneider Electric for any consequences arising out of the use of this material.

**To the extent permitted by applicable law, no responsibility or liability is assumed by Schneider Electric and its subsidiaries for any errors or omissions in the informational content of this document, as well as any non-intended use or misuse of the content thereof.**

## Safety

### Important Information



**Read these instructions carefully, and look at the equipment to become familiar with the device before trying to install, operate, or maintain it. The following special messages may appear throughout this documentation or on the equipment to warn of potential hazards or to call attention to information that clarifies or simplifies a procedure.**



The addition of this symbol to a "Danger" or "Warning" safety label indicates that an electrical hazard exists which will result in personal injury if the instructions are not followed.



This is the safety alert symbol. It is used to alert you to potential personal injury hazards. Obey all safety messages that follow this symbol to avoid possible injury or death.

#### **⚠ DANGER**

**DANGER** indicates a hazardous situation which, if not avoided, **will result** in death or serious injury.

#### **⚠ WARNING**

**WARNING** indicates a hazardous situation which, if not avoided, **could result** in death or serious injury.

#### **⚠ CAUTION**

**CAUTION** indicates a hazardous situation which, if not avoided, **could result** in minor or moderate injury.

#### **NOTICE**

**NOTICE** is used to address practices not related to physical injury.

#### **PLEASE NOTE**

- All applicable local, regional and national regulations must be complied with during the installation, use, maintenance and replacement of this device.
- Schneider Electric cannot be held responsible in the event of non-compliance with the instructions in this document and in the documents to which it refers.
- The service instruction must be observed throughout the life time of this device.

**To simplify the illustrations, only the power and earth wiring are shown in the document.**

#### **⚠ ⚠ WARNING**

##### **RISK OF INJURY OR DAMAGING THE CHARGING STATION**

- The installation, maintenance and eventual replacement of this device must only be carried out by a qualified electrician.
- This device must not be repaired.
- This device should not be installed if, when unpacking, you observe that it is damaged.
- Do not install the product under bad weather condition without adequate protections.

**Failure to follow these instructions could result in death, serious injury, or equipment damage.**

## ⚠ ⚠ DANGER

### HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH


- It is mandatory to read the detailed instruction sheet of this device and to look at the device to become familiar with it before attempting to install it, operate it, repair it or perform maintenance on it.
- Wear suitable personal protective equipment (PPE) and follow all safety procedures.
- Turn off all power supplying this device before working on or inside device.
- Always use a properly rated voltage sensing device to confirm power is off.

**Failure to follow these instructions will result in death or serious injury.**

1 Charging station accessory bag ref EVA2PBS1	Bag for Instruction Sheet	1
	Bag for fasteners	1
	Instruction Sheet (notice)	1
	Ring tongue	1
	Nut	5


2 Charging station accessory bag ref EVA2PBS2	Bag for Instruction Sheet	1
	Bag for fasteners	1
	Instruction Sheet (notice)	1
	Ring tongue	2
	Nut	10

Conversion kit accessory bag ref EVA2PCS2	Bag for fasteners	1
	Label to download the Instruction Sheet	1
	Ring tongue	1
	Nut	5


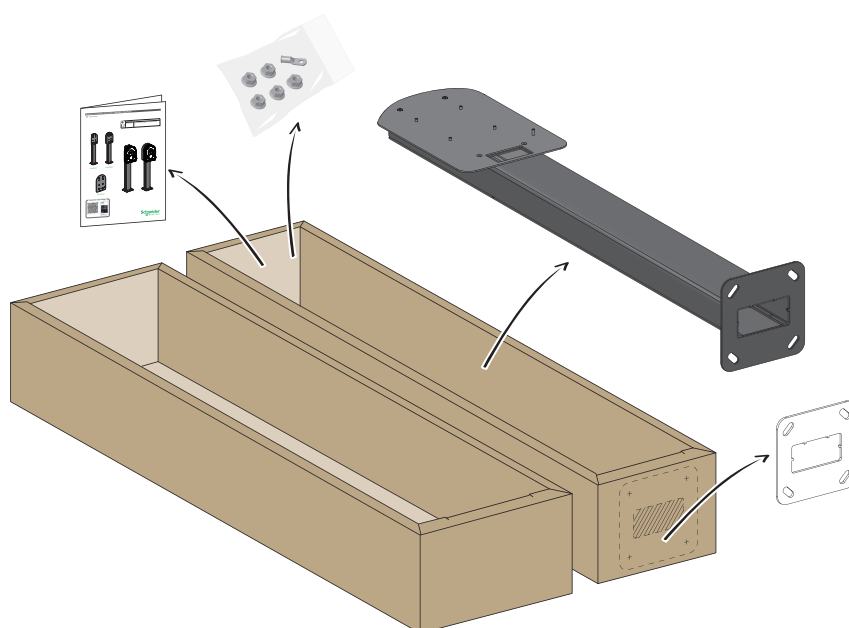


The 4 fixing M16 shanks and nuts / washer are not provided. The installer decides the length of the M16 shank to use based on the ground type.



# 1 Content





T25 security




2/4



PH2



T20 security



Note: Tools not part of the package.

# 2 Civil works

## DANGER

### HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH


Install a ground rod if the ground resistance is greater than the threshold defined in the applicable standards and local laws.

**Failure to follow these instructions will result in death or serious injury.**

## NOTICE





### RISK OF DAMAGING THE PEDESTAL

- The pedestal must be attached to the ground in accordance with applicable standards and local laws.
  - The pedestal must be secured with stainless steel M16 threaded rods (not supplied).
  - Impact protection devices (impact by vehicle) must be installed around the pedestal. (Protection devices not supplied)
- Failure to follow these instructions could result in equipment damage.**

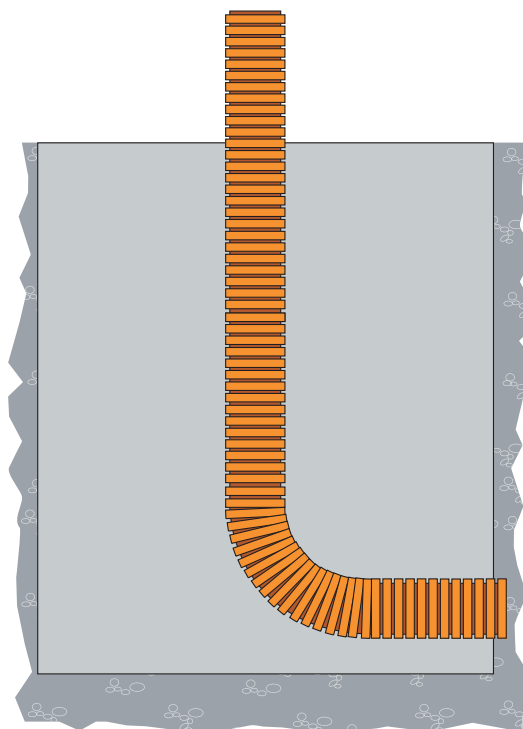


The pedestal is designed to accommodate up to two sleeves of maximum diameter 62 mm.

mm  
in.

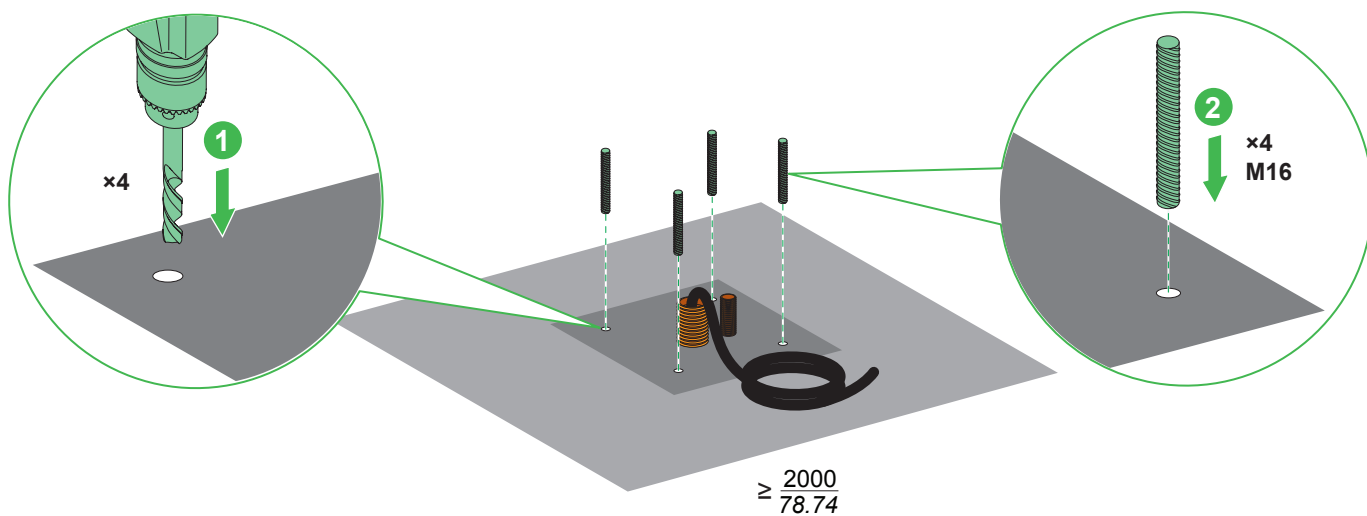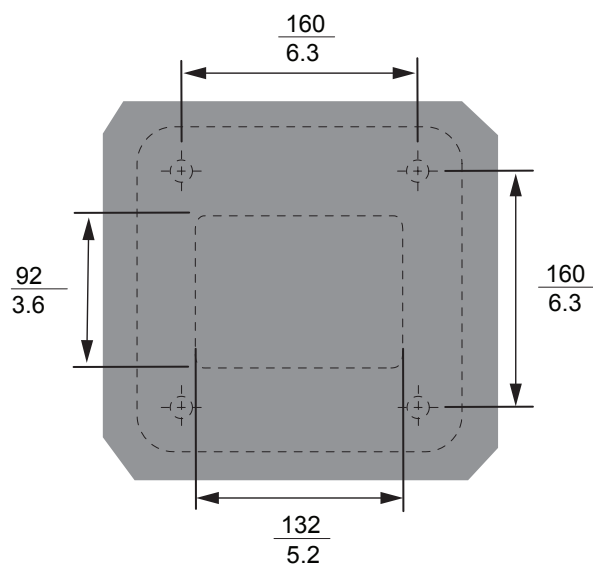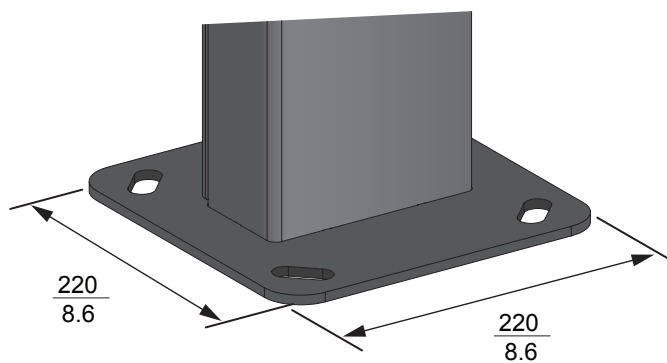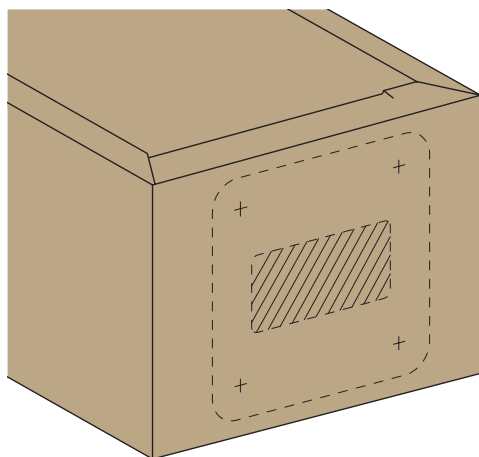

The 4 M16 shanks must protrude between 10 mm and 25 mm above the plate of the pedestal and nut.  
If a signal or Ethernet cable is used, separate it from the path of the power cable.



**⚠ ⚠ DANGER****HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH**

Remember to position the edge protection supplied to prevent damage to the cables.  
Failure to follow these instructions will result in death or serious injury.

**⚠ CAUTION****RISK OF CUTTING**


Wear suitable protective gloves.  
Failure to follow these instructions could result in injury or equipment damage.

**NOTICE****RISK OF DAMAGING THE PEDESTAL**

Place the pedestal on its packaging.  
Failure to follow these instructions could result in equipment damage.



**3.1 Dimensions**

mm  
in.

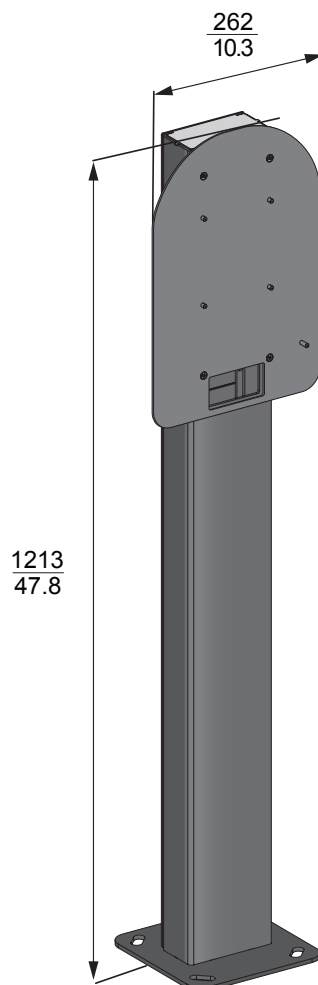


## 3.2 For a single charging station




Do not damage the pedestal, put it on the cardboard cover.

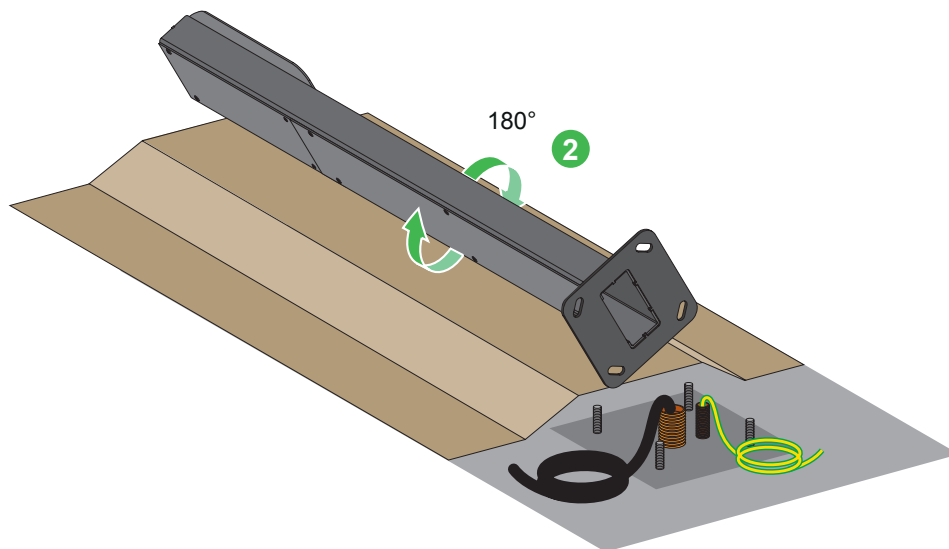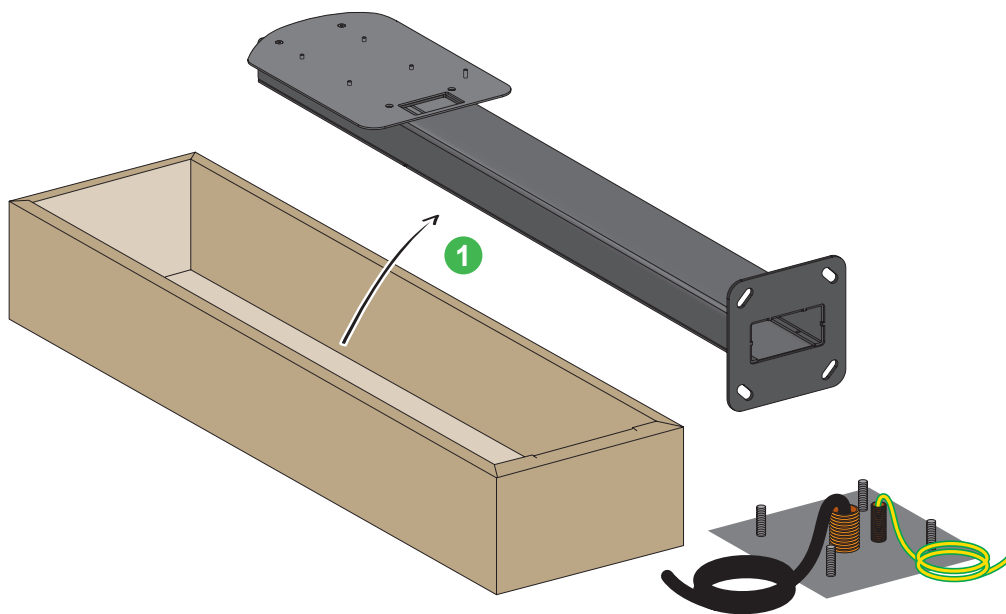




## 3.2 For a single charging station

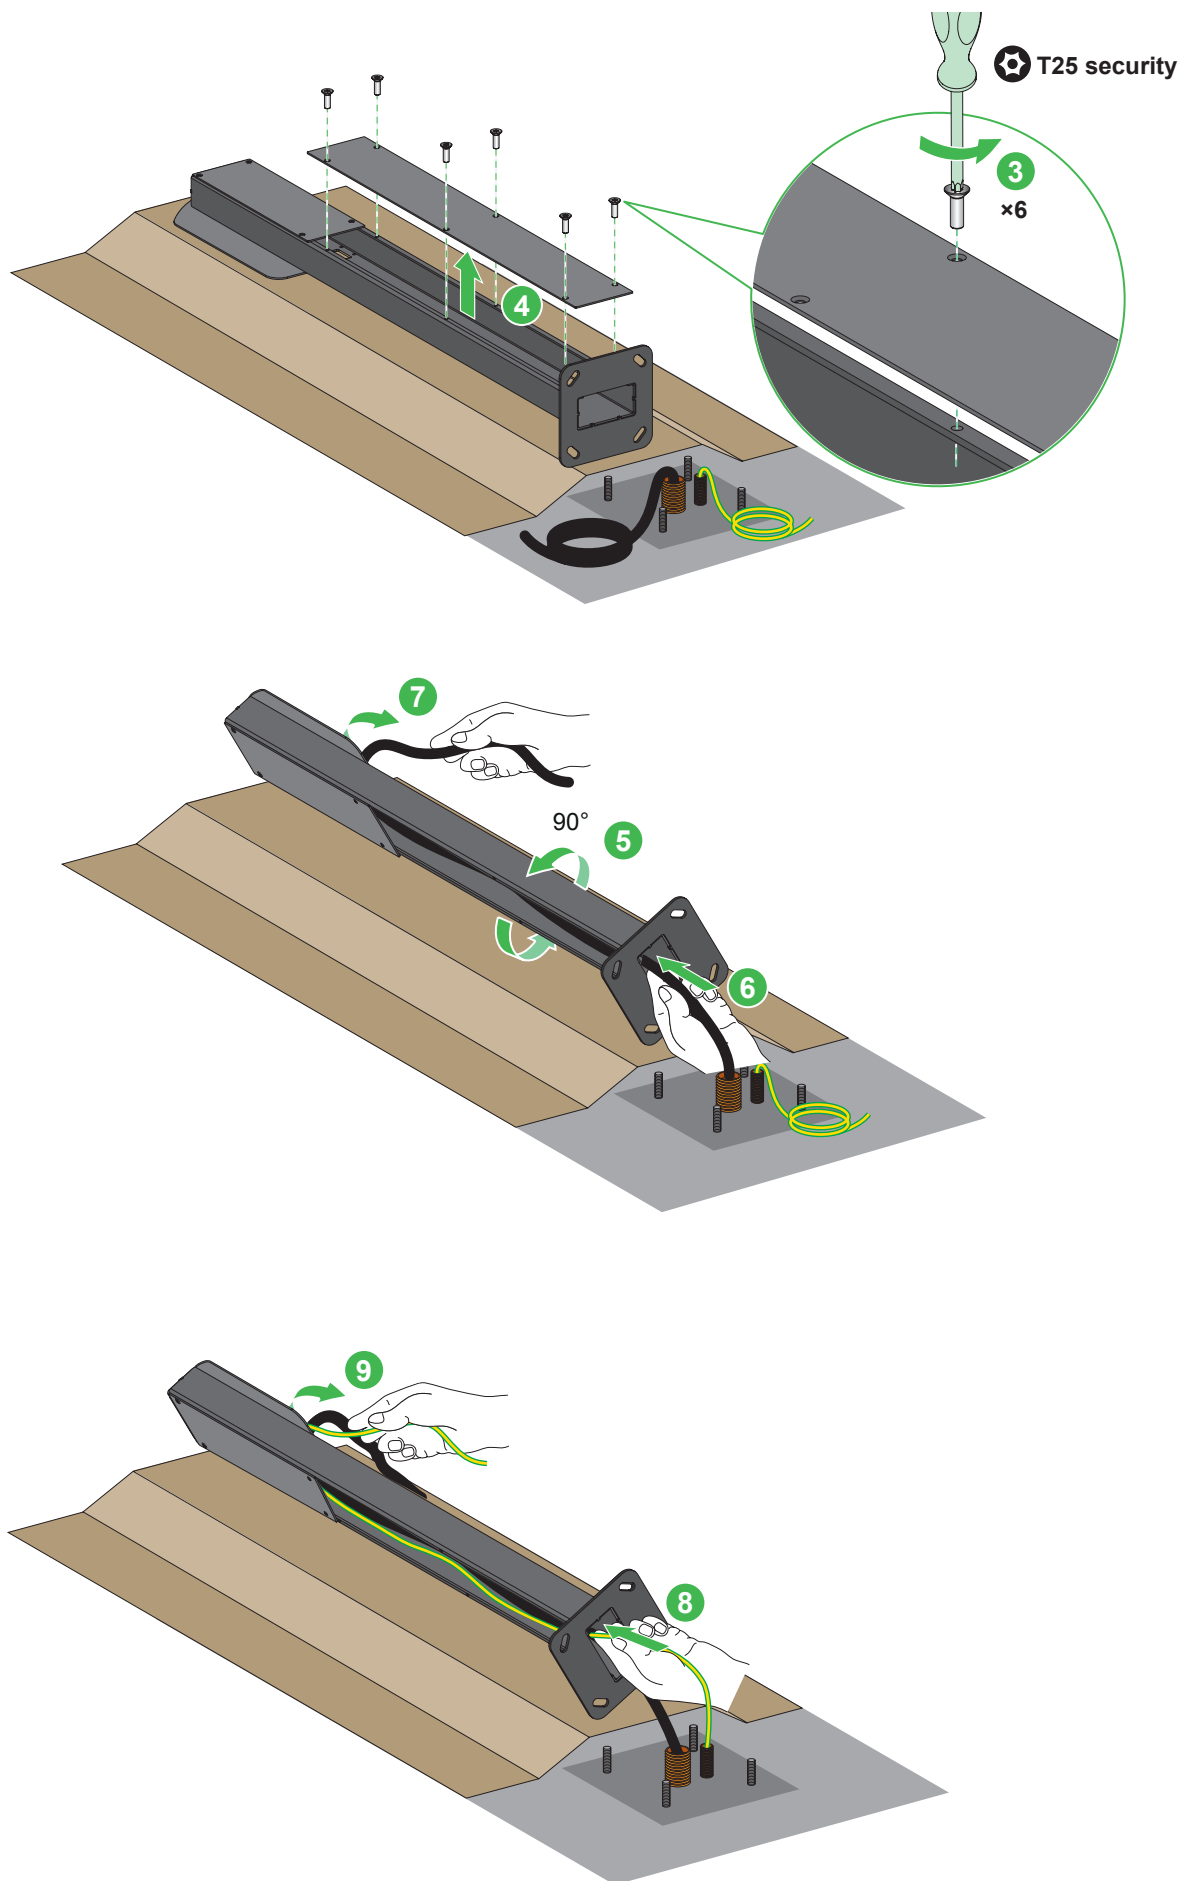

## 3.3 For two charging stations

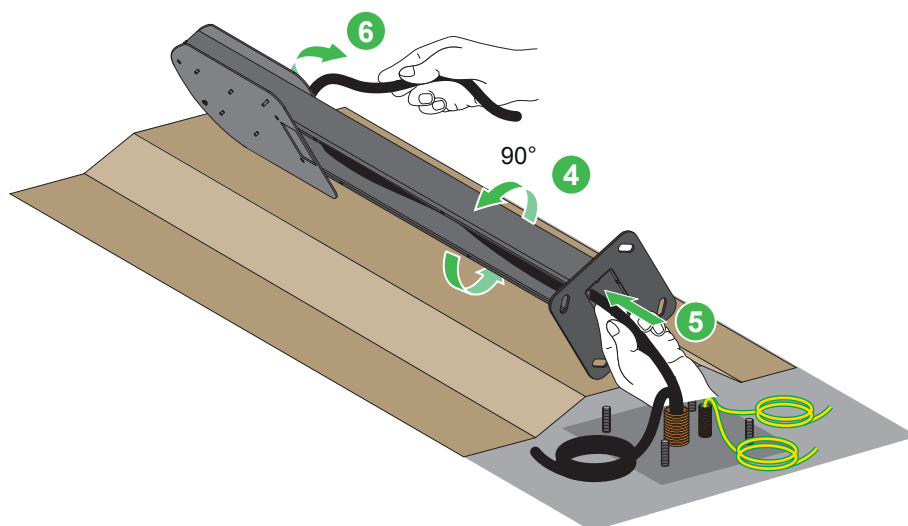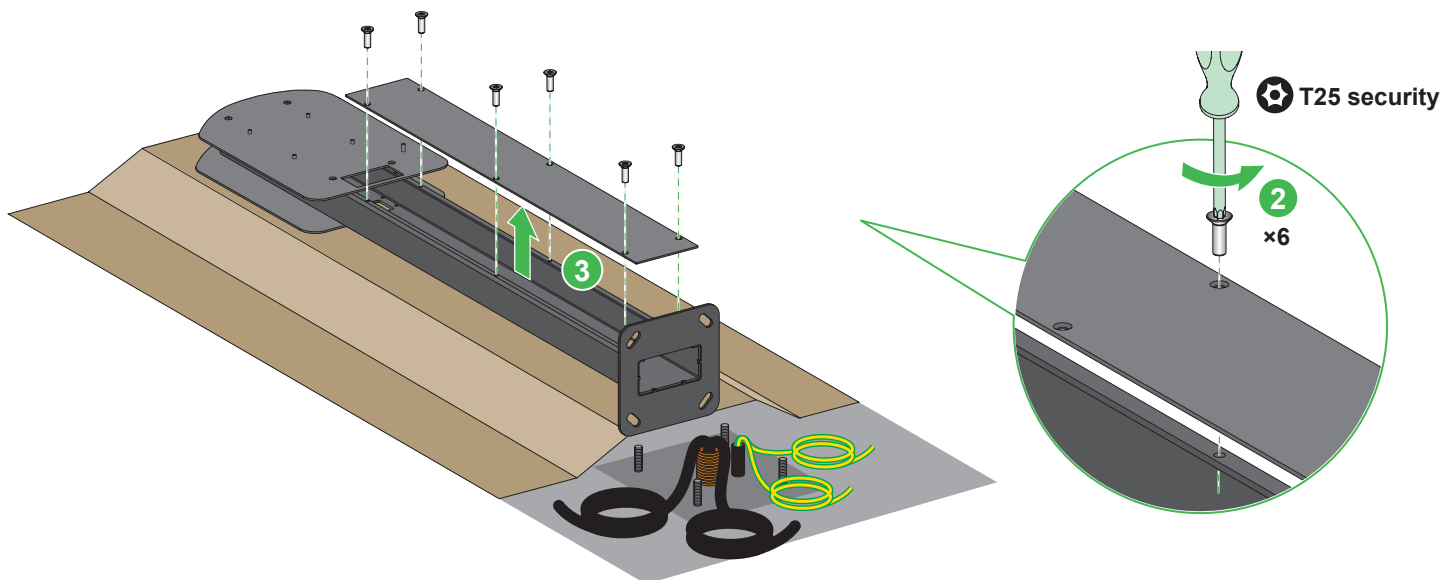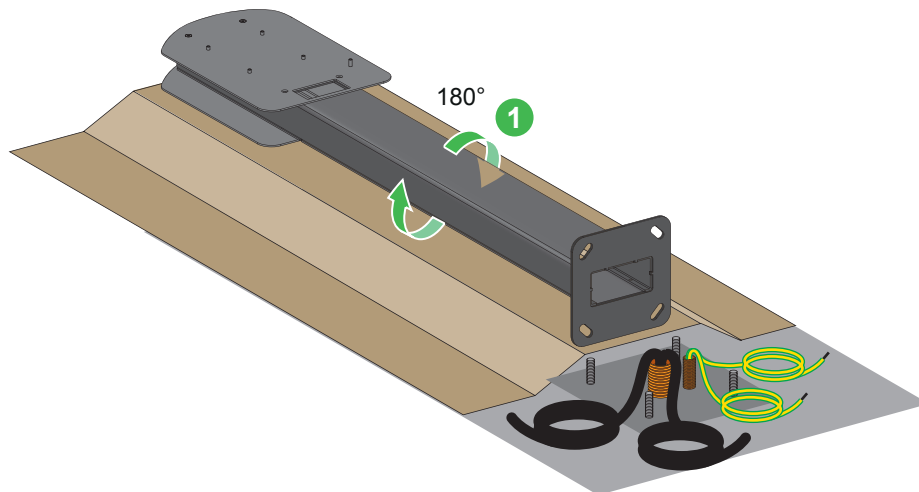


## 3.3 For two charging stations

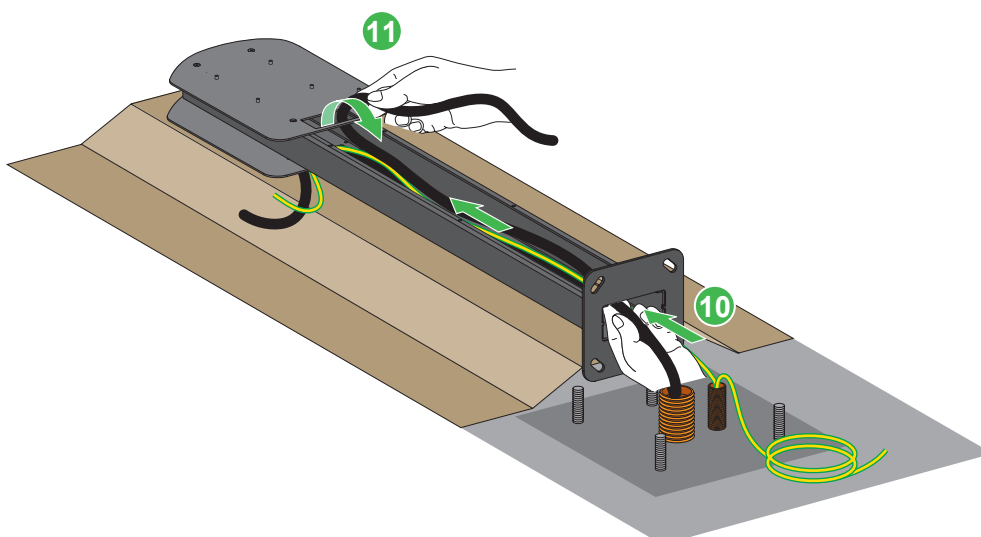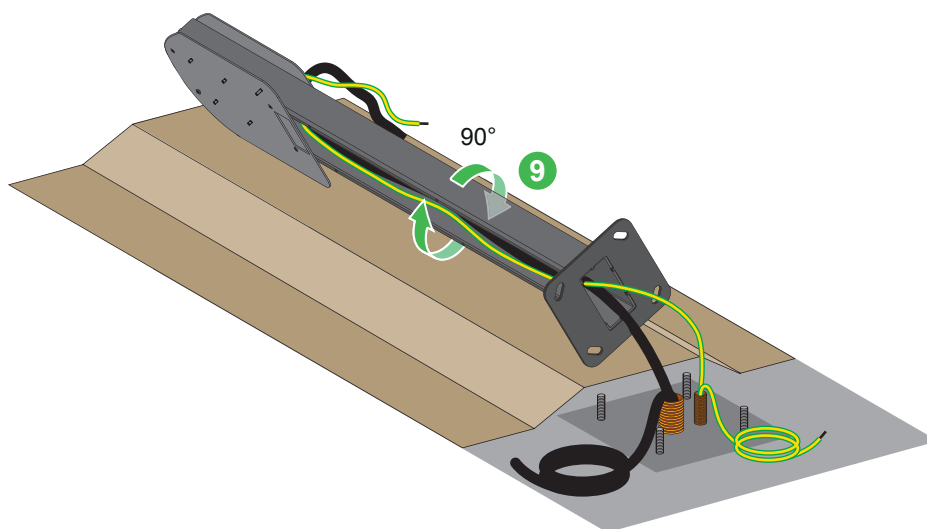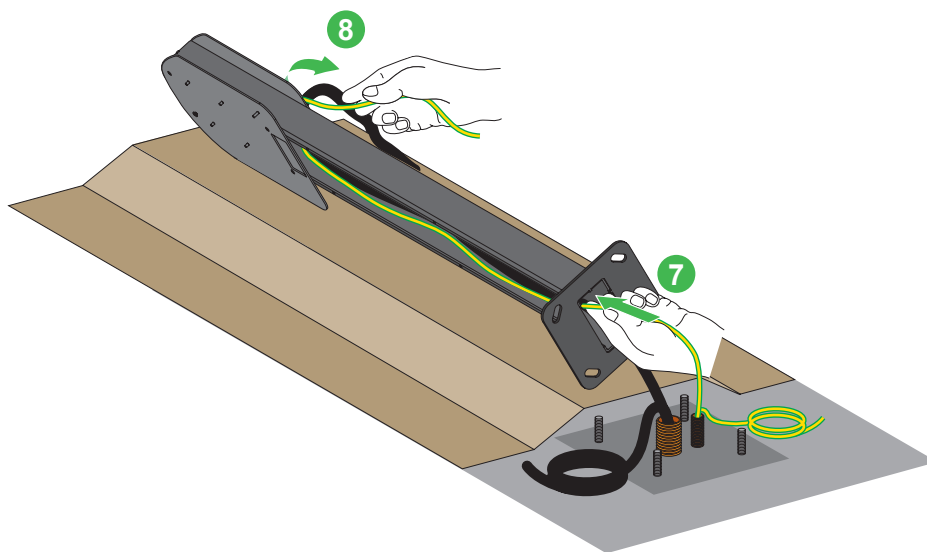

# 3

## Preparing the pedestal


### 3.3 For two charging stations

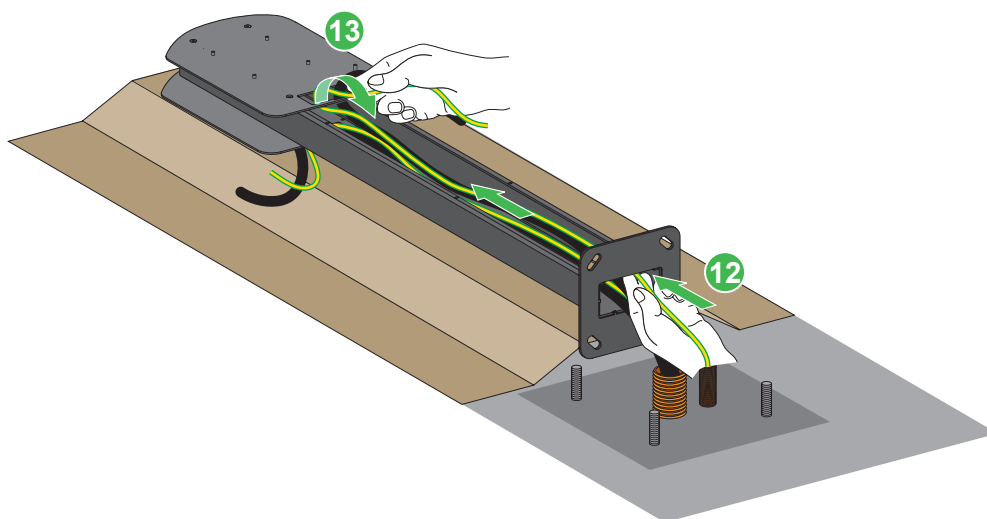

To simplify the illustrations, only the power wiring is shown in the remainder of the document.

# 4

## Attaching the pedestal

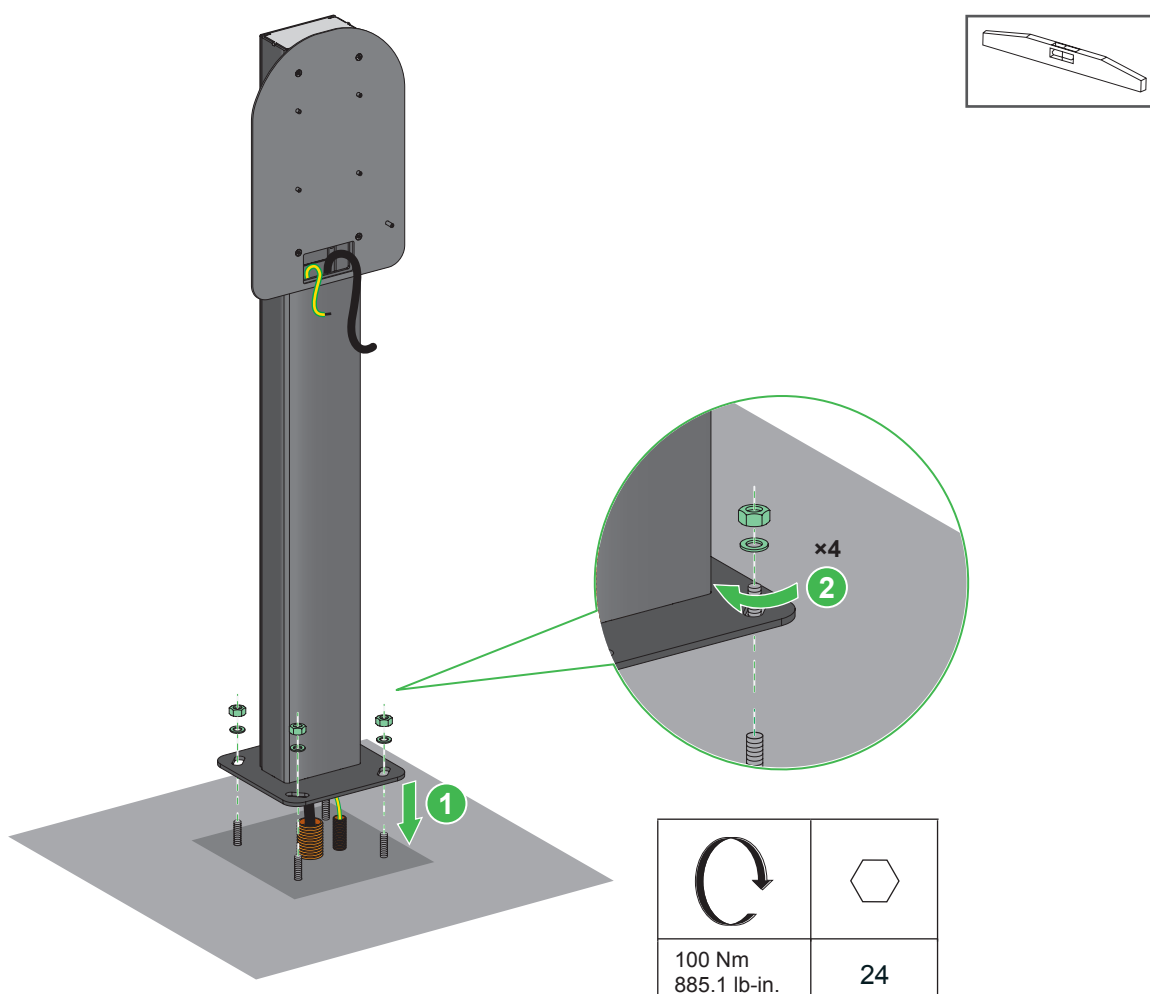


## ⚠ ⚠ WARNING

### HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH

Be sure to observe the tightening torque.

Failure to follow these instructions could result in death or serious injury.

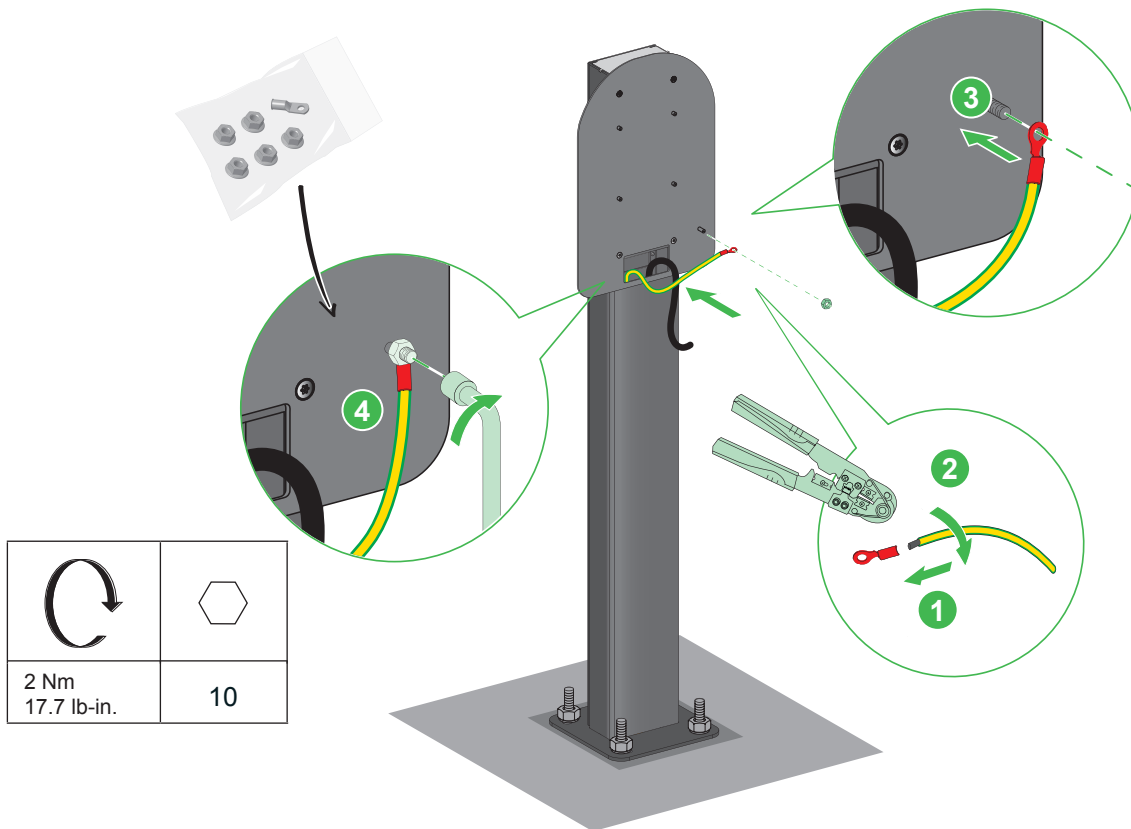


## ⚠ ⚠ WARNING


### RISK OF IN JURY OR DAMAGING THE CHARGING STATION

- Ground the pedestal by making a connection to a ground rod or the ground terminal of the charging station.
- An extra ground rod must be added every 10 m maximum in the case of clustered charging stations.
- The resistance of each extra ground rod must be less than the maximum value defined in the enforceable electrical installation standards.
- For the installation to comply with EV Ready and ZE Ready protocols, the ground resistance must not exceed 100  $\Omega$ .
- All the ground lines must be connected together to form a single equipotential link.

Failure to follow these instructions could result in death, serious injury, or equipment damage.

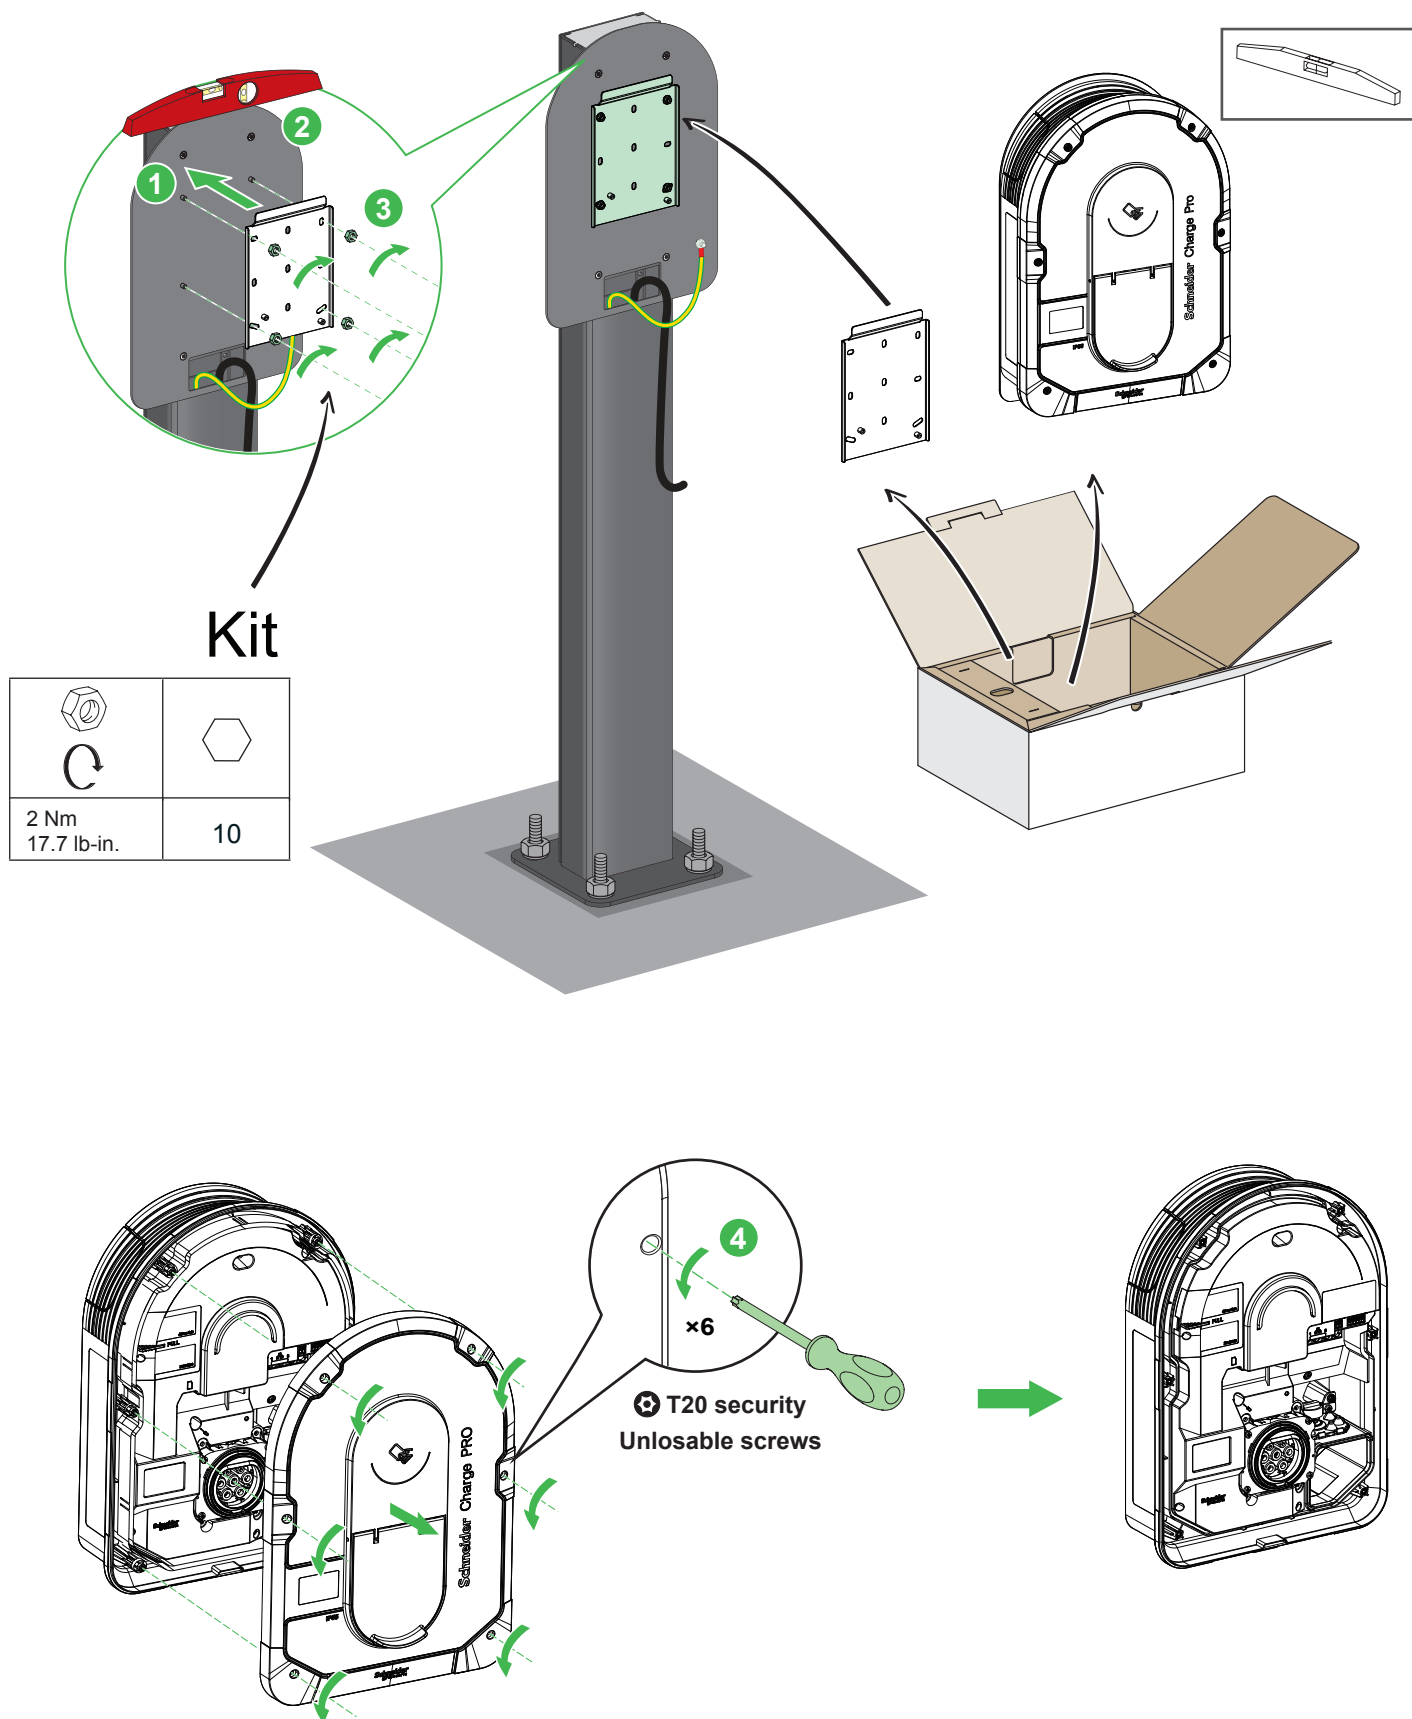
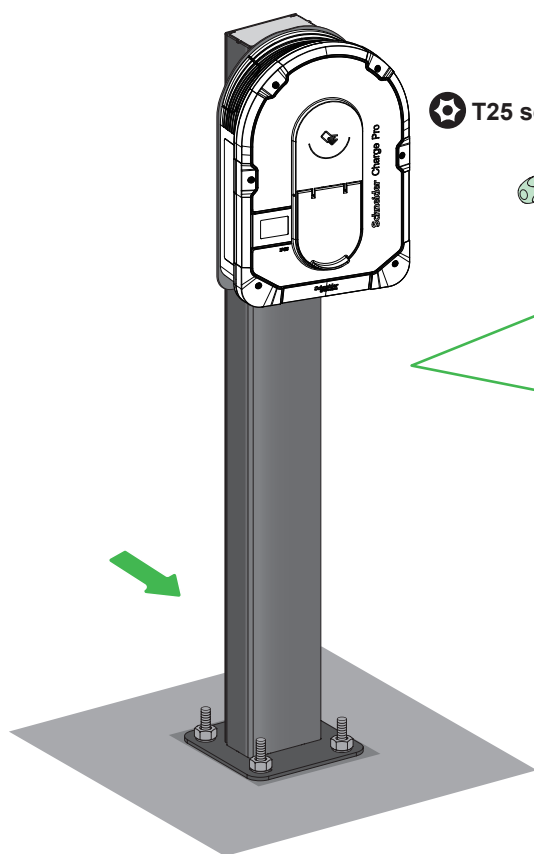


All the connections inside the charging station are described in its installation guide.  
Avoid the cables to be visible below the charging station.


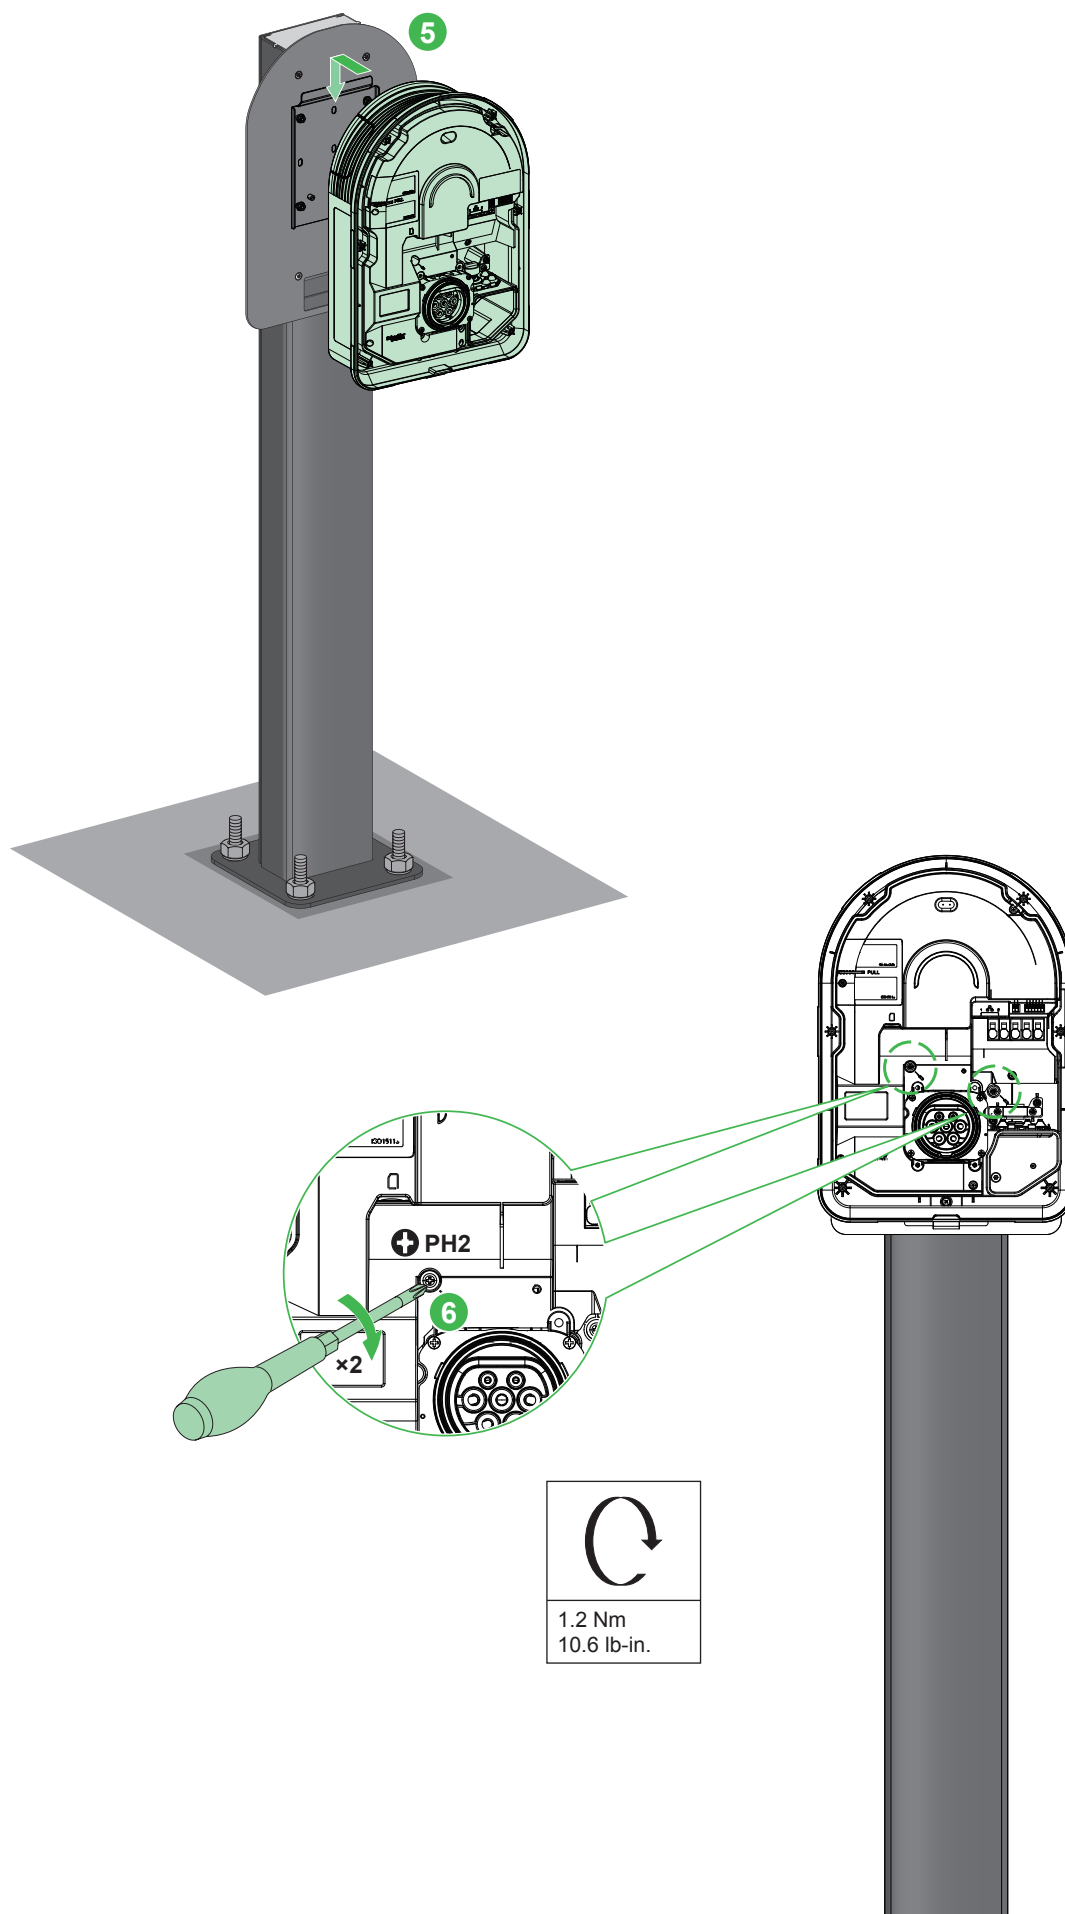


## Assembling the charging station

### For a single charging station




**x6**

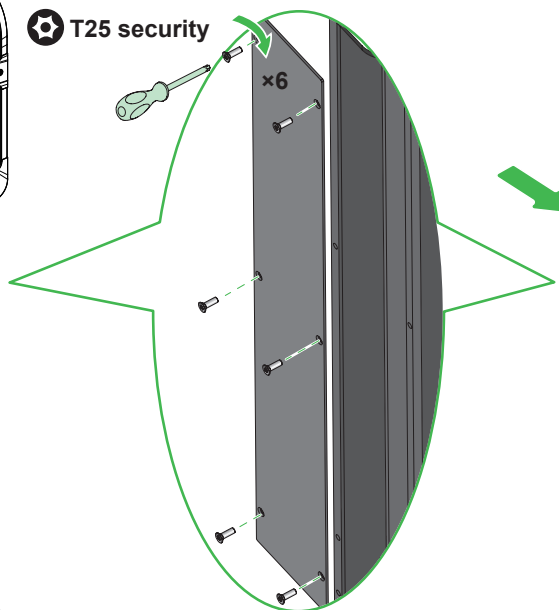


5 Nm  
44.3 lb-in.

### For two charging stations

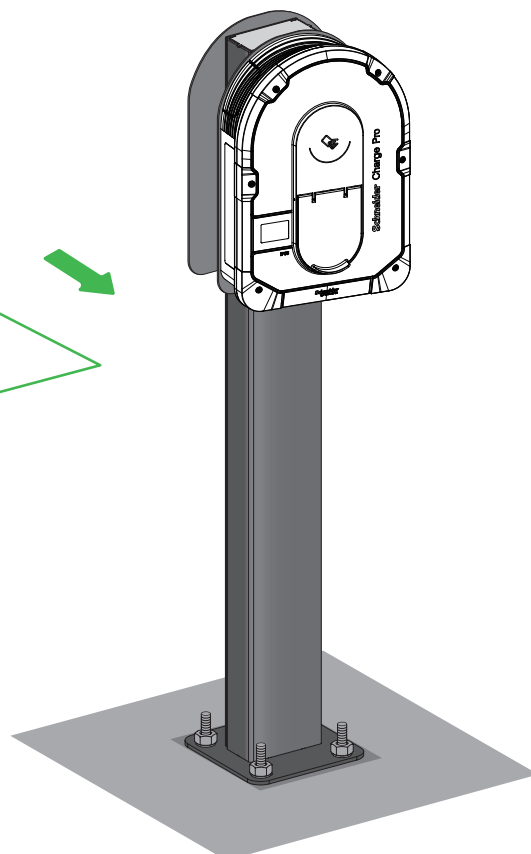

7

### Convert Single Charging Station Pedestal into Double charging station pedestal

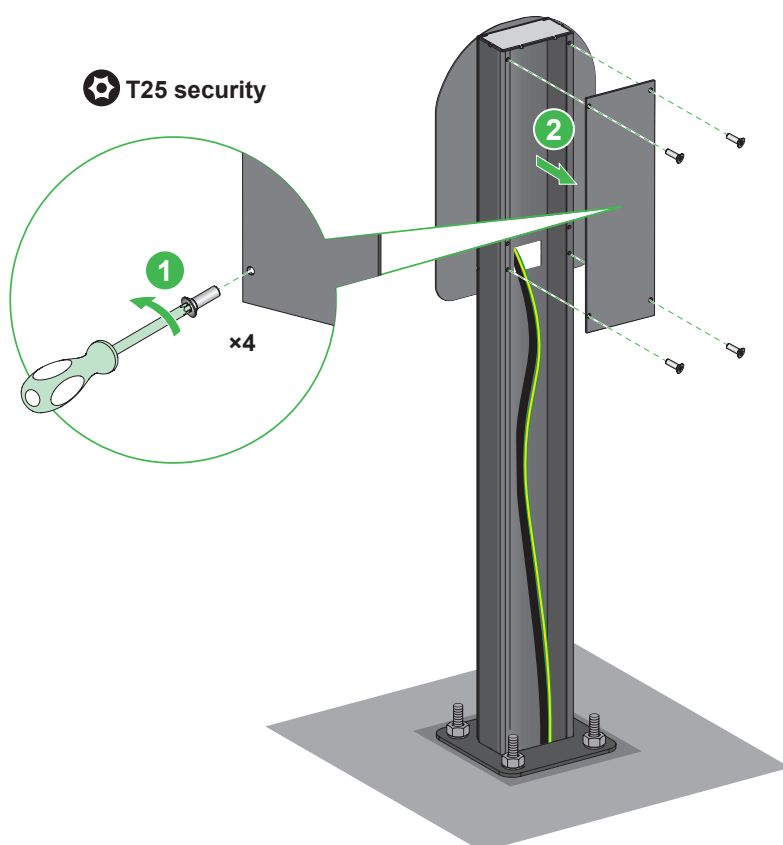


1

x4



## 7

## Convert Single Charging Station Pedestal into Double charging station pedestal

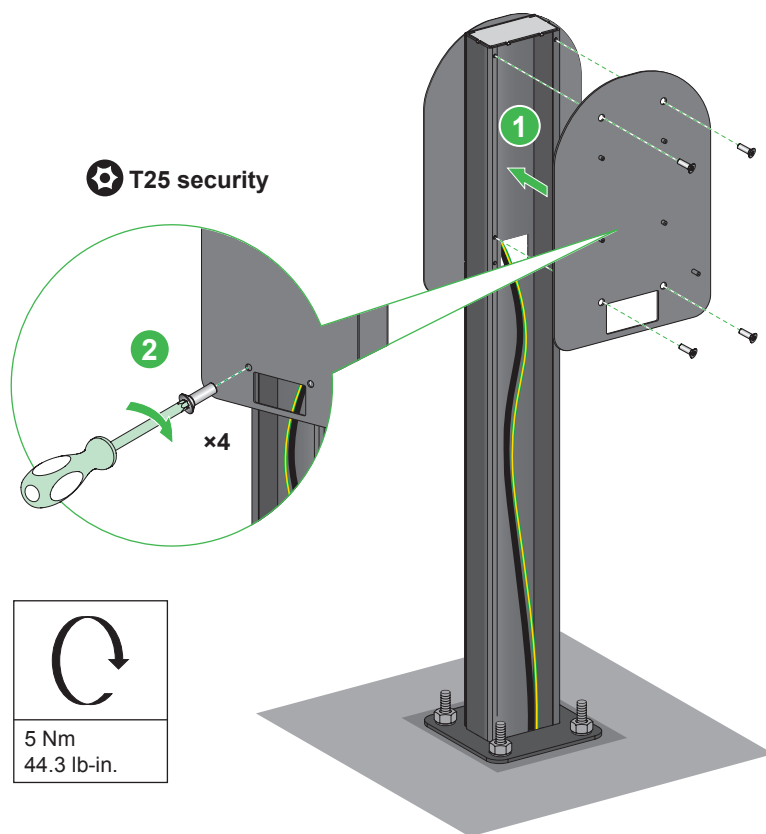

Note: Use the same screw as the one removed in the first step.

### ⚠ ⚠ DANGER

#### HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH

- Regularly check the integrity of the cable.
- Beware of potential hazards, and carefully inspect the work area for tools and objects that may have been left inside the device.
- Test and ensure earth continuity on all metallic parts of the pedestal before power on.

**Failure to follow these instructions will result in death or serious injury.**

## 8

## Technical data

- Aluminium pedestal painted with colours matching the charging station: grey body RAL 7016
- Stainless steel screws
- Mechanical protection class: IK10 (IEC 62262)
- Weight of the 1 charging station pedestal: 9kg
- Weight of the 2 charging stations pedestal: 10kg

## 9

## Recycling packaging

- The packaging materials from this accessory can be recycled.
- Please help protect the environment by recycling them in appropriate containers.
- Thank you for playing your part in protecting the environment.