
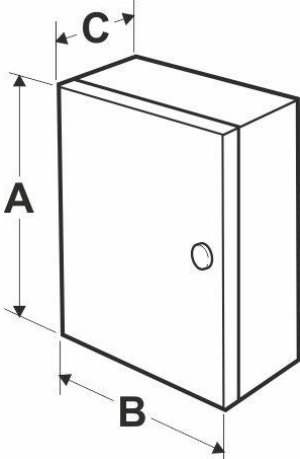


QUA-016, rev.: 00

|  | <table border="1"> <thead> <tr> <th>Referencia</th> <th>Dimensiones mm AxBxC</th> </tr> </thead> <tbody> <tr> <td>39123</td> <td>280x210x130</td> </tr> <tr> <td>39134</td> <td>400x300x165</td> </tr> <tr> <td>39145</td> <td>500x400x175</td> </tr> <tr> <td>39146</td> <td>600x400x200</td> </tr> <tr> <td>39157</td> <td>700x500x245</td> </tr> <tr> <td>39168</td> <td>800x600x260</td> </tr> </tbody> </table> | Referencia | Dimensiones mm AxBxC | 39123 | 280x210x130 | 39134 | 400x300x165 | 39145 | 500x400x175 | 39146 | 600x400x200 | 39157 | 700x500x245 | 39168 | 800x600x260 |  |
|---|--|------------|-------------------------|-------|-------------|-------|-------------|-------|-------------|-------|-------------|-------|-------------|-------|-------------|---|
| Referencia | Dimensiones mm AxBxC | | | | | | | | | | | | | | | |
| 39123 | 280x210x130 | | | | | | | | | | | | | | | |
| 39134 | 400x300x165 | | | | | | | | | | | | | | | |
| 39145 | 500x400x175 | | | | | | | | | | | | | | | |
| 39146 | 600x400x200 | | | | | | | | | | | | | | | |
| 39157 | 700x500x245 | | | | | | | | | | | | | | | |
| 39168 | 800x600x260 | | | | | | | | | | | | | | | |
| BOX INSTALLATION | FIXATION OF THE BOX TO THE WALL THROUGH LATERAL SUPPORTS TO ENSURE IP65 PROTECTION | | | | | | | | | | | | | | | |
| APPLIED NORM | Directive 2006/95/CE - Real Decret 7/1988 REBT 2002: Low tension standard | | | | | | | | | | | | | | | |
| ENCLOSURE CLASIFICATION | TYPE OF MATERIAL: ISOLATING | | | | | | | | | | | | | | | |
| | FIXATION MODE : ON THE WALL/CEILING | | | | | | | | | | | | | | | |
| | UTILISATION ENVIRONMENT : OUTDOOR/INDOOR | | | | | | | | | | | | | | | |
| | PROTECTION DEGREE : IP65 | | | | | | | | | | | | | | | |
| | IMPACT RESISTANCE : IK08 | | | | | | | | | | | | | | | |
| ELECTRIC STRENGTH | 2.5 kV | | | | | | | | | | | | | | | |
| RATED INSULATION TEMPERATURE | 90 °C (Thermic clase 90, Y) | | | | | | | | | | | | | | | |
| DIMENSIONAL STABILITY | TEMPERATURE: - 25 °C / + 85 °C HUMIDITY : 100 % HR | | | | | | | | | | | | | | | |
| STRUCTURAL CHARACTERISTICS | BLIND COVER HALOGEN FREE SURFACE INSTALLATION UTILISATION ENVIRONMENT : OUTDOOR/INDOOR METAL PLATE LOCK ELEMENTS TO BE INSTALLED ON THE PLATE : <ul style="list-style-type: none"> • RCCB'S • MCB'S • METERS • LIGHTING PILOTS • DOMOTIC EQUIPS • TIMERS, ETC. RATED LOADING CAPACITY: 2 Kg. | | | | | | | | | | | | | | | |
| NORM: | UNE EN 61439-1 / UNE EN 61439-3 / UNE EN 62208:2012 | | | | | | | | | | | | | | | |